




EN. Description

Lighting fixture for recessed installation in ceiling.
 Housing made of extruded aluminum with highly pure powder coating.
 Available in white (RAL 9003), black (RAL 9005)
 It mounts COB led. Can be order upto CRI97
 The led driver is included and external to the fixture.
 The fixture is IP65 rated and optional IP54.
 The lumen output is based on 3000K (CRI90) led.

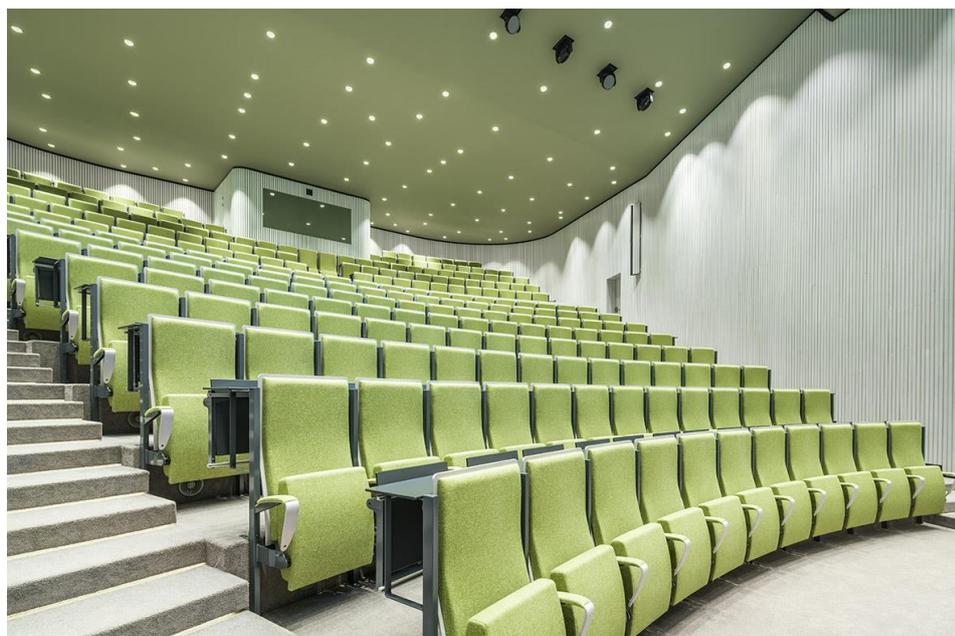


IT. Descrizione

Apparecchio di illuminazione per installazione a incasso a soffitto.
 Corpo in alluminio estruso con verniciatura a polvere ad alta purezza.
 Disponibile nei colori bianco (RAL 9003), nero (RAL 9005).
 Montaggio LED COB. Disponibile fino a CRI97.
 Il driver LED è incluso ed esterno all'apparecchio.
 L'apparecchio ha un grado di protezione IP65 e IP54 opzionale.
 Il flusso luminoso si basa su LED a 3000K(CRI90).



White Black Chrome

Provide personalized customization with multiple colors to choose from

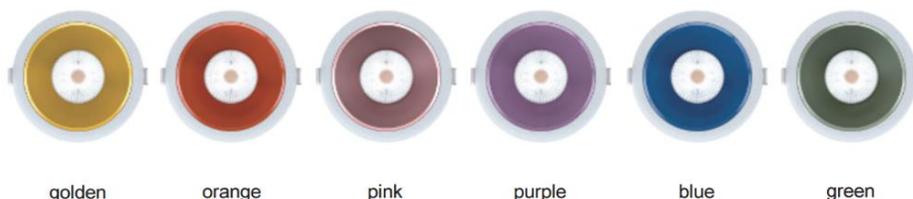

golden orange pink purple blue green

ASTA



Product information

LZ-12122

Installation / Installazione:	Recessed / Incassato
Material / Materiale:	Aluminum / Alluminio
Painting / Verniciatura:	Highly pure powder coating / Verniciatura a polvere
System power(W):	12- 60
Fixture lumen output(lm):	960- 4800
System efficiency(lm/W):	80
Led driver / alimentatore	Included / Incluso

Light source information

Led Typology / Tipo di Led:	COB CREE
Led power consumption (W)	12-60
Lumen output / Flusso 3000K CRI 90 (lm):	1440- 7200
Led efficiency (lm/W):	120



Code composition / Composizione del codice


Model	CRI	RA	CCT	K	Beam °	Color	Cover	Dimming
LZ-12122	90	>95 SDCM 3	30	3000	15° / 24°	WH White	Lens	On-Off
	95	>95 SDCM 3	40	4000	36° / 55°	BK Black		DALI
			50	5000		Custom	0-10V	

Specifications / Specifiche


Model	Wattage	Input voltage	Luminous Flux	Cut out	Outer dia
LZ-12122-12	12W	120V- 240V	960lm	Φ75	85
LZ-12122-18	18W	120V- 240V	1440lm	Φ95	105
LZ-12122-30	30W	120V- 240V	2400lms	Φ115	131
LZ-12122-35	35W	120V- 240V	2800lm	Φ135	150
LZ-12122-45	45W	120V- 240V	3600lms	Φ175	191
LZ-12122-60	60W	120V- 240V	4800lms	Φ200	215




Power	12W
Diameter mm	Φ85
Cut-out mm	Φ75
Height mm	58
Angle	15°/24°/36°/55°



Power	18W
Diameter mm	Φ105
Cut-out mm	Φ95
Height mm	65
Angle	15°/24°/36°/55°




Power	30W
Diameter mm	Φ132
Cut-out mm	Φ115
Height mm	75
Angle	15°/24°/36°/55°




Component / Componenti



Power	35W
Diameter mm	Φ 150
Cut-out mm	Φ 135
Height mm	80
Angle	15°/24°/36°/55°



Power	45W
Diameter mm	Φ191
Cut-out mm	Φ 175
Height mm	95
Angle	15°/24°/36°/55°



Power	60W
Diameter mm	Φ215
Cut-out mm	Φ200
Height mm	105
Angle	15°/24°/36°/55°

