


LZ-SOFT STRIP 2835-120P

TEC.DRAWINGS

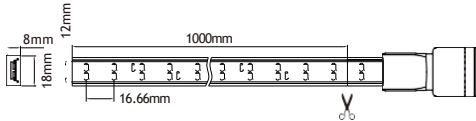


TECHNICAL DATA

INPUT VOLTAGE	
IP OPTIONS	IP65
LED TYPE	SMD2835
LIFESPAN	3 Years
DIMMABLE	Yes
CRI	>80
BEAM ANGLE	120°
CUTTING INTERVALS	1m
LED DISTANCE	16.66mm

POLAR AND CONE DIAGRAM


PHOTOMETRIC OF 1M STRIP

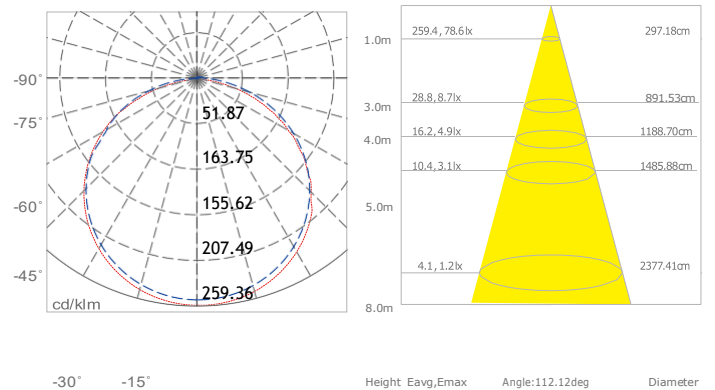

PRODUCTION OPTIONS

Item No.	Input voltage(V)	Power (W)	Color temperature	RA	FPCB width	Lumen/M	Cutting Possibility	Max Run length	Body Size (MM)	Beam Angle	IP Grade
LZ-2131-SMD2835-120P	AC230 V	8W/M	R:652-630nm G:515-525nm B:460-470nm	/	12MM	/	1M	50M	18*8	120°	IP 65
		8W/M	3000±100K 4000±100K 6500±500K	>80		600±10lm					
LZ-2130-SMD2835-120P	AC120V	8W/3FT	R:652-630nm G:515-525nm B:460-470nm	/	12 MM	/	0.5M	50M	18*8	120°	IP 65
		9W/3FT	2700±100K 4000±100K 6500±500K	>80		600±10lm/3FT					

ACCESSORY INFORMATION

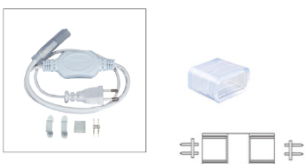

LED Strip 2835 Accessory package



PRODUCT FEATURES

- High quality lens with beam angle 120°, Ensure the uniform lighting
- Excellent weather resistance and UV resistance
- Working temperature: -20-55°C

SPECIFICATION

POWER CONSUMPTION	HIGH COLOR RENDERING INDEX	SUPER HIGH LIGHT OUTPUT