

# VELAR -10



Ground recessed up-light, versatile choice of wattage on VELAR for highlighting facades in a functional way, solid construction, good choice of selection with multiple diameters, lumen packages and beam options, excellent consistency of light color, aluminum die-cast body, tempered safety glass, 316 stainless steel ring, high grade of impact and slipping resistance, delivered with plastic recessed pot.

Incasso a terra up-light, versatile scelta del wattaggio su VELAR per evidenziare le facciate in modo funzionale, costruzione solida, buona scelta di selezione con più diametri, pacchetti lumen e opzioni di fascio, eccellente consistenza del colore della luce, corpo in alluminio pressofuso, temperato vetro di sicurezza, anello in acciaio inossidabile 316, alto grado di resistenza agli urti e allo scivolamento, fornito con vaso in plastica da incasso.

## Product information

**LZ-24112-20C/20W**


|                                      |  |
|--------------------------------------|--|
| Installation / Installazione:        | Recessed / Interrato                         |
| Material / Materiale:                | Die-Aluminum / Alluminio                     |
| Front Cover / Verniciatura:          | Stainless Steel316L / Verniciatura a polvere |
| System power(W):                     | 10   |
| Fixture lumen output(lm):            | 900  |
| System efficiency(lm/W):             | 90   |
| Led driver / alimentatore            | Included / Incluso                           |
| Tilt Angle / Angolo di inclinazione: | Tilt 25°                                     |

## Light source information

|  |          |
|--|----------|
| Led Typology / Tipo di Led:              | COB CREE |
| Led power consumption (W)                | 10       |
| Lumen output / Flusso 3000K CRI 80 (lm): | 1200     |
| Led efficiency (lm/W):                   | 120      |

## Material Accessories

|  |                                   |
|--|-----------------------------------|
| Cable galand                                   | IP-68 copper and nickel coated    |
| Step tempered glass/Gradino in vetro temperato | T=12MM, Loading capacity: >1330kg |
| Power cable/Cavo di alimentazione              | 0.5m H05RN-F 2x1.0mm2             |
| Driver / Prodotti per scatola:                 | 12-24V DC/AC110-277V              |

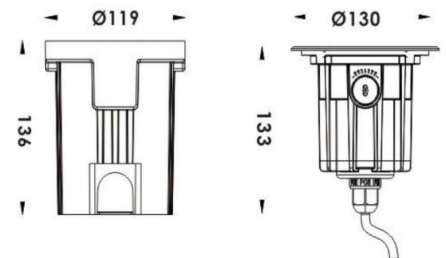

## Code composition / Composizione del codice

| Model    | Power | CRI | RA         | CCT K   | Beam °   | Color    | Cover | Dimming |
|----------|-------|-----|------------|---------|----------|----------|-------|---------|
| LZ-24112 | 10W   | 80  | >82 SDCM 3 | 30 3000 | 15-20-30 | WH White | Clear | On-Off  |
|          |       |     | >92 SDCM 3 | 40 4000 | BK Black | Frosted  | DALI  |         |
|          |       |     | C RGB      | SG Grey | DMAX     |          |       |         |




## Accessories



Connector IP68  
A62591



Anti slip glass  
A60212

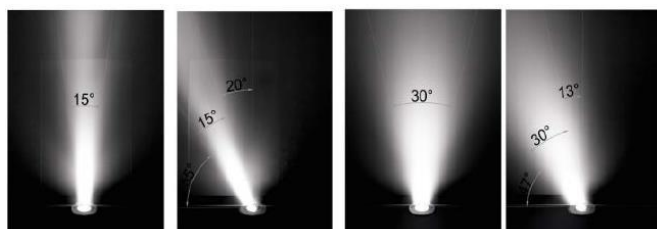

## Wire Connection :

220VAC

