

VELAR -10



Ground recessed up-light, versatile choice of wattage on VELAR for highlighting facades in a functional way, solid construction, good choice of selection with multiple diameters, lumen packages and beam options, excellent consistency of light color, aluminum die-cast body, tempered safety glass, 316 stainless steel ring, high grade of impact and slipping resistance, delivered with plastic recessed pot.

Incasso a terra up-light, versatile scelta del wattaggio su VELAR per evidenziare le facciate in modo funzionale, costruzione solida, buona scelta di selezione con più diametri, pacchetti lumen e opzioni di fascio, eccellente consistenza del colore della luce, corpo in alluminio pressofuso, temperato vetro di sicurezza, anello in acciaio inossidabile 316, alto grado di resistenza agli urti e allo scivolamento, fornito con vaso in plastica da incasso.

Product information

LZ-24112-10C/10W

Installation / Installazione:	Recessed / Interrato
Material / Materiale:	Die-Aluminum / Alluminio
Front Cover/ Verniciatura:	Stainless Steel316L / Verniciatura a polvere
System power(W):	10
Fixture lumen output(lm):	900
System efficiency(lm/W):	90
Led driver / alimentatore	Included / Incluso
Tilt Angle / Angolo di inclinazione:	Tilt 25°




Light source information

Led Typology / Tipo di Led:	COB CREE
Led power consumption (W)	10
Lumen output / Flusso 3000K CRI 80 (lm):	1200
Led efficiency (lm/W):	120

Material Accessories

Cable galand	IP-68 copper and nickel coated
Step tempered glass/Gradino in vetro temperato	T=12MM, Loading capacity: >1330kg
Power cable/Cavo di alimentazione	0.5m H05RN-F 2x1.0mm2
Driver / Prodotti per scatola:	12-24V DC/AC110-277V

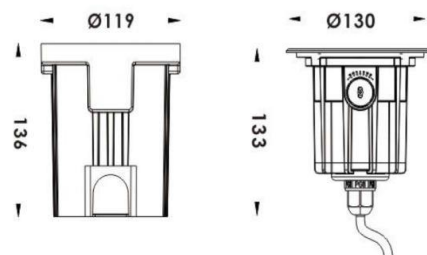

Code composition / Composizione del codice

Model	Power	CRI	RA	CCT K	Beam °	Color	Cover	Dimming
LZ-24112	10W	90	>22 SDCM 3	30 3000	18-20-30	WH White	Clear	On-Off
		95	>97 SDCM 3	40 4000		BK Black	Frosted	DALI
			C RGB			SG Grey		DMAX




Accessories



Connector IP68
A62591

Anti slip glass
A60212

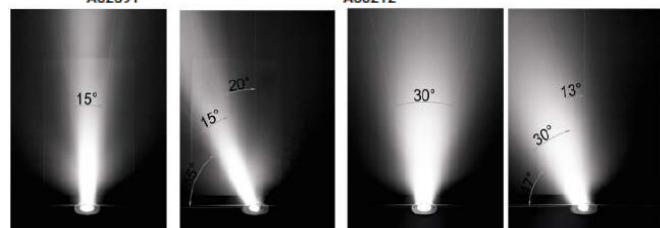

Wire Connection :

220VAC

