

LV-COB-280P

TECHNICAL DATA

INPUT VOLTAGE	24V DC
IP CODE	IP20
LED TYPE	COB
SERVICE LIFE	5 Years
COPPER THICKNESS	35um+35um
CRI	>90
BEAM ANGLE	180°




Optional IP Rating




PRODUCTION OPTIONS

Item No.	Input voltage (V)	Power (W)	Color temperature	FPCB width	Luminous Efficiency	Luminous Flux	Cutting Possibility (MM)	Max Run length	LED QTY (PCS)
LZ-1391CB	24V DC	5 W/M	2700±100K	5 MM	90-100lm/W	320-370lm/M	50.00MM	5M	280pcs
			3000±100K			360-400 lm/M			
			4000±200K			410-475 lm/M			
			6000±250K			480-500 m/M			

Dimension Drawing:

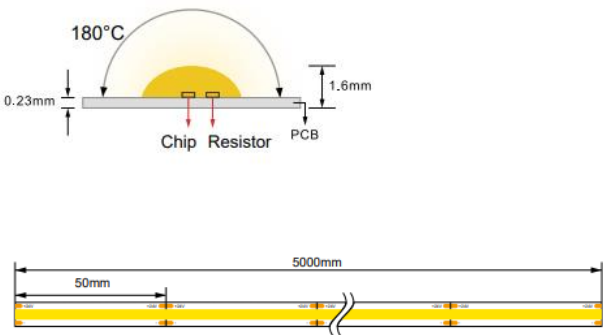

Construction Drawing:

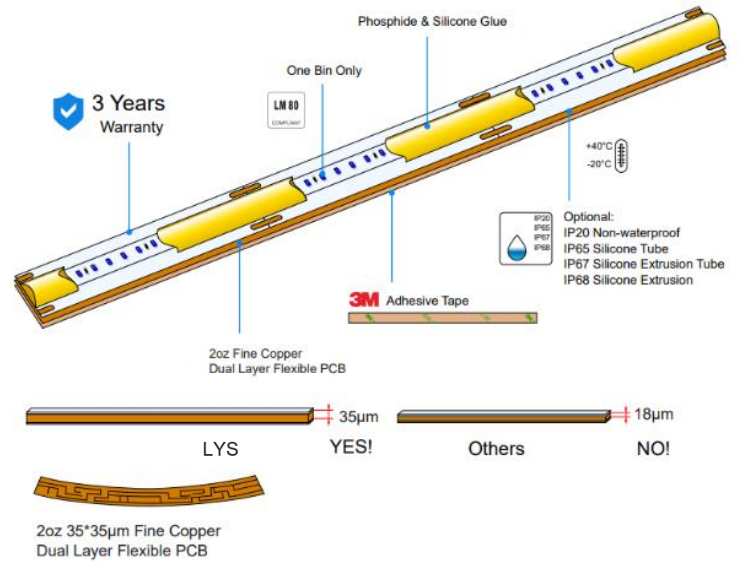

RoHS CE facts®



PRODUCT FEATURES

- Beam angle 180 degree
- High density LED, no shadow
- Uniform lighting
- Extremely flexible
- New technical against traditional strips
- Working temperature: -40~45°C

SPECIFICATION

POWER CONSUMPTION			HIGH COLOR RENDERING INDEX				SUPER HIGH LIGHT OUTPUT	