


LV-COB-384P


TEC.DRAWINGS



TECHNICAL DATA

INPUT VOLTAGE	24V DC
IP CODE	IP20
LED TYPE	COB
SERVICE LIFE	5 Years
COPPER THICKNESS	35um+35um
CRI	>90
BEAM ANGLE	180°


Dimension Drawing:

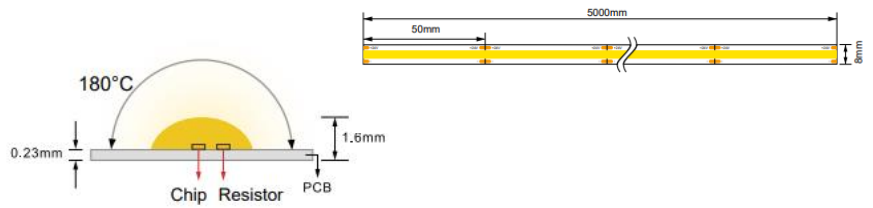


PRODUCTION OPTIONS

Item No.	Input voltage (V)	Power (W)	Color temperature	FPCB width	Luminous Efficiency	Luminous Flux	Cutting Possibility (MM)	Max Run length	LED QTY (PCS)
LZ-13912CB	24V DC	10 W/M	2500±100K 3000±200K 4250±250K 6250±250K	8 MM	90-100lm/W	800-1000lm/M 800-1000lm/M 800-1000lm/M 800-1000m/M	41.67MM	5M	384pcs

illuminance Diagram:

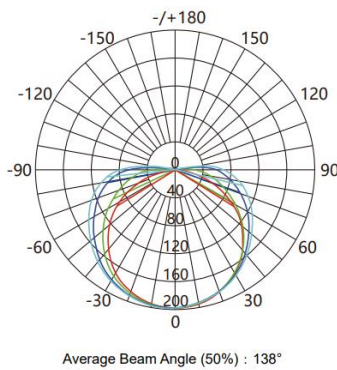

Average Luminous Flux

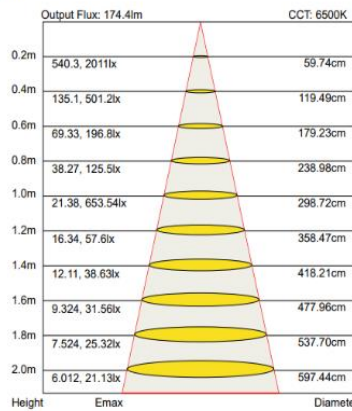

RoHS CE facts®



PRODUCT FEATURES

- Beam angle 180 degree
- High density LED, no shadow
- Uniform lighting
- Extremely flexible
- New technical against traditional strips
- Working temperature: -40~45°C

SPECIFICATION

HIGH COLOR RENDERING INDEX

SUPER HIGH LIGHT OUTPUT

POWER CONSUMPTION

