

# LINY - 18



Discreet, sleek and ultra-thin innovative linear recessed flush mounting luminaire for floor/ground/wall and ceiling installation, designed to enhance architectural features and facades, ultimate control of glare, available in two different width and lengths, 316L SS outer trim, 7mm thick step tempered glass, die-casting aluminum radiator with powder coating, achieve the products superior adhesion and corrosion resistance, static load resistance of 3000Kg, optional 24Vdc models also available.

Innovativo apparecchio da incasso lineare da incasso discreto, sottile e ultrasottile per installazione a pavimento/terra/parete e soffitto, progettato per migliorare le caratteristiche architettoniche e le facciate, il massimo controllo dell'abbagliamento, disponibile in due diverse larghezze e lunghezze, rivestimento esterno in acciaio inox 316L, 7 mm vetro temperato a gradino spesso, radiatore in pressofusione di alluminio con verniciatura a polvere, garantiscono ai prodotti un'adesione e una resistenza alla corrosione superiori, resistenza al carico statico di 3000Kg, disponibili anche modelli 24Vdc opzionali.

## Product information

### LZ-24512-18 /18W

Installation / Installazione:	Recessed / Interrato
Material / Materiale:	Die-Aluminum / Alluminio
Front Cover / Verniciatura:	Stainless Steel316L / Verniciatura a polvere
System power(W):	12*1.5W
Fixture lumen output(lm):	1530
System efficiency(lm/W):	85
Led driver / alimentatore	Included / Incluso
Tilt Angle / Angolo di inclinazione:	No




## Light source information

Led Typology / Tipo di Led:	LED CREE XPG
Led power consumption (W)	12*1.5W
Lumen output / Flusso 3000K CRI 80 (lm):	1800
Led efficiency (lm/W):	100





## Material Accessories

Cable galand	IP-68 copper and nickel coated
Step tempered glass/Gradino in vetro temperato	T=12MM,Loading capacity: >1330kg
Power cable/Cavo di alimentazione	0.5m H05RN-F 2x1.0mm2
Driver / Prodotti per scatola:	12-24V DC/AC110-245V

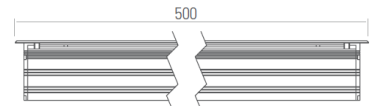

## Code composition / Composizione del codice

Model	Power	CRI	RA	CCT	K	Beam °	Color	Cover	Dimming
LZ-24512	18W	80	>82	SDCM 3	30	3000	15-25-30	SS	Clear On-Off
		90	>92	SDCM 3	40	4000	Grey	Frosted DALI	




One input - one output




One input - two output

### MONOCOLOR

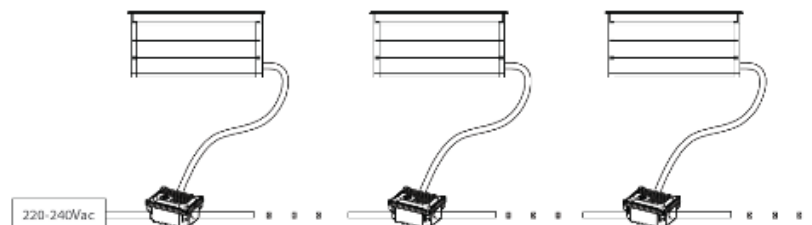

We recommend using the water-proof connectors as shown above for all outdoor fixtures. Installers should prepare the appropriate main cables of suitable rating and diameter with the right IP rated connectors.

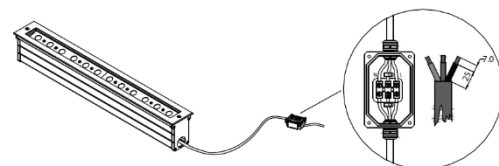

(to be ordered separately)