

MIRO- S



Wall recessed luminaire for functional or directional lighting, can be used for indoor or outdoor applications, maintenance-free, ideal for applications such as lighting walkways and Driveway ramp, die-cast aluminum housing with corrosion-resistant paint, polycarbonate lens protects the LED from moisture, dirt and other contaminants, advanced sense of style delivers maximum durability and functionality, provides long lasting performance in many wet location applications, integrated driver.

Apparecchio di illuminazione da incasso a parete per illuminazione funzionale o direzionale, utilizzabile per applicazioni interne ed esterne, esente da manutenzione, ideale per applicazioni quali l'illuminazione di passerelle e scale, alloggiamento in alluminio pressofuso con vernice resistente alla corrosione, lente in policarbonato che protegge il LED da umidità, sporco e altri contaminanti, stile avanzato che garantisce la massima durata e funzionalità, prestazioni di lunga durata in molte applicazioni in luoghi umidi, driver integrato

Product information	LZ-28712-/8W
Installation / Installazione:	Recessed / Interrato
Material / Materiale:	Die-Aluminum / Alluminio
Front Cover/ Verniciatura:	Die-Aluminum / Alluminio
System power(W):	8
Fixture lumen output(lm):	720
System efficiency(lm/W):	90
Led driver / alimentatore	Included / Incluso
Tilt Angle / Angolo di inclinazione:	No



Light source information	
Led Typology / Tipo di Led:	COB CREE
Led power consumption (W)	8
Lumen output / Flusso 3000K CRI 90 (lm):	240
Led efficiency (lm/W):	960



Material Accessories

Cable galand	IP-68 copper and nickel coated
Step tempered glass/Gradino in vetro temperato	T=12MM, Loading capacity: >1330kg
Power cable/Cavo di alimentazione	0.5m H05RN-F 2x1.0mm2
Driver / Prodotti per scatola:	12-24V DC/AC110-240V



Code composition / Composizione del codice

Model	Power	CRI	RA	CCT	K	Beam °	Color	Cover	Dimming	
LZ-28712	8W	90	>83	SDCM 3	30	3000	WH	White	Clear	On-Off
		95	>95	SDCM 3	40	4000	BK	Black	Frosted	
							SL	Silver		

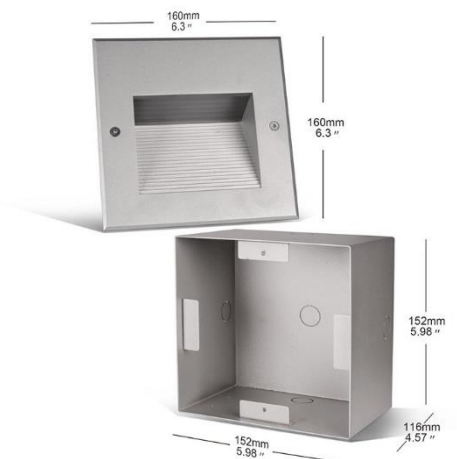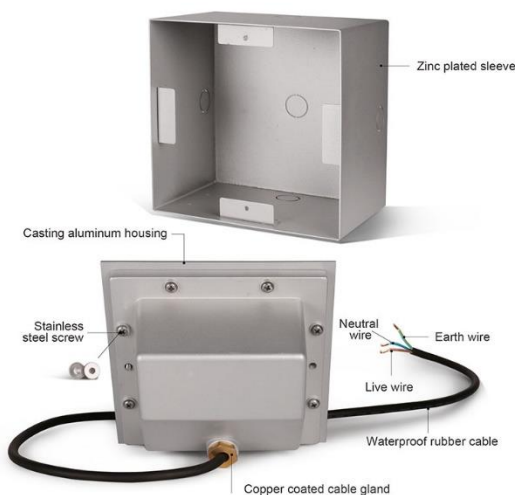

EASY TO INSTALL



① Dig mounting sleeve hole in the wall, reserve outlet wires and wiring terminals, and turn off the power



② Place the mounting sleeve in the embedded hole of the wall and fix it




③ Connect the wires and put the lamps in the mounting sleeve



④ Turn on the power, and power-on test

Installation steps

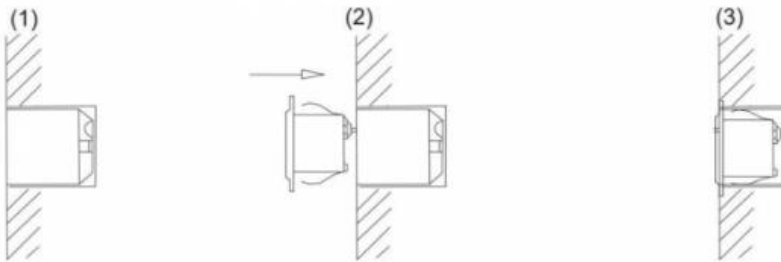

1. Drill holes at the installation site according to the embedded parts, and embed the embedded parts into the wall, keeping the edge of the embedded parts and the wall at the same level.
2. Connect the luminaire to the cable, leaving enough length for future maintenance.
3. Put the lamp into the embedded part and tighten the screws, light on and test.

