

# AMBRO -12



Discreet and compact aesthetically designed architectural outdoor spotlight in two body sizes, ideal for accent lighting, with single high power LED, die-cast aluminium body, stainless steel screws, 6mm toughened glass, flexibility in lighting effect, extremely narrow to wide beam options, highly reliable, suitable for a variety of mounting applications including ground, wall, tree, sign and architectural accents, integral driver, easy installation.

Faretto da esterno architettonico discreto e compatto dal design estetico in due dimensioni del corpo, ideale per l'accento illuminazione, con singolo LED ad alta potenza, corpo in alluminio pressofuso, viteria in acciaio inox, vetro temperato 6mm, flessibilità nell'effetto luminoso, opzioni a fascio estremamente stretto o ampio, altamente affidabile, adatto a una varietà di applicazioni di montaggio inclusi terra, parete, albero, segnaletica e accenti architettonici, driver integrato, installazione semplice

## Product information

### LZ-22412-12

Installation / Installazione:	Surface / Superficie
Material / Materiale:	Die-Aluminum / Alluminio
Front Cover / Verniciatura:	Aluminum body +PMMA lens
System power(W):	12
Fixture lumen output(lm):	1020
System efficiency(lm/W):	85
Led driver / alimentatore	Included / Incluso
Tilt Angle / Angolo di inclinazione:	Yes



## Light source information


Led Typology / Tipo di Led:	CREE XTE
Led power consumption (W)	12
Lumen output / Flusso 3000K CRI 80 (lm):	1440
Led efficiency (lm/W):	120

## Material Accessories

Cable galand	IP-67 copper and nickel coated
--------------	--------------------------------

## Code composition / Composizione del codice

Model	Power	CRI	RA	CCT K	Beam °	Color	Cover	Dimming
LZ-22412	12W	80	>82 SDCM 3	30 3000	6°,12°	White	Clear	On-Off
		90	>92 SDCM 3	40 4000	25°,40°	Black	Frosted	

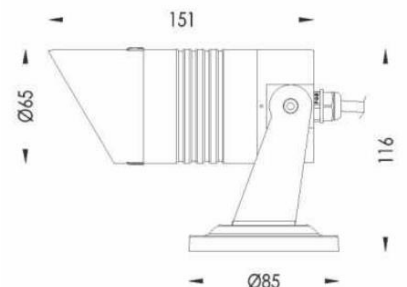


## Mounting Accessories



One input - two output

We recommend using the water-proof connectors as shown above for all outdoor fixtures. Installers should prepare the appropriate main cables of suitable rating and diameter with the right IP rated connectors.

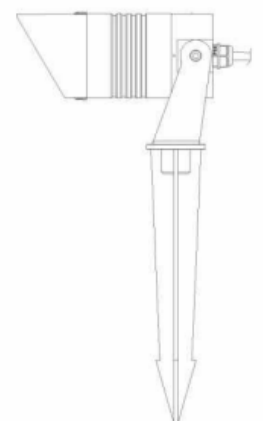

Connector IP68  
A62591