

SPOT MINI -7R

Directional spotlight for maximum demands, ideal for general accent lighting applications, modular design, IP40 from the front, can be swiveled upto 38° (except IP65), standard power supply included, wider outer trim allows it for upgrading existing high voltage spotlights to LED, consistent color stability, low-glare optics, higher price-performance ration, simple, rapid mounting with clip system, suitable for hotel rooms, retail, bars and restaurants.

Faretto direzionale per le massime esigenze, ideale per applicazioni di illuminazione d'accento generale, IP40 frnte design modulare, può essere ruotato fino a 38° (eccetto IP65), alimentatore standard incluso, rivestimento esterno più ampio consente di aggiornare i faretti ad alta tensione esistenti a LED, stabilità del colore costante, ottica a basso abbagliamento, rapporto qualità prezzo più elevato, montaggio semplice e rapido con sistema a clip, adatto per camere d'albergo, negozi, bar e ristoranti.

Product information**LZ-12812-7R/7W**

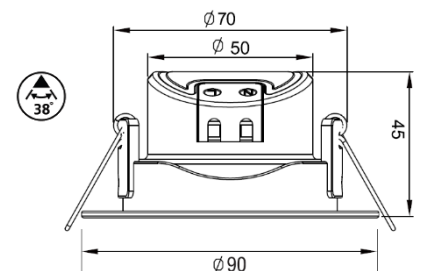

Installation / Installazione:	Recessed / Interrato
Material / Materiale:	High Quality PVC / PVC di alta qualità
Front Cover / Verniciatura:	Stainless Steel316L / Verniciatura a polvere
System power(W):	7
Fixture lumen output(lm):	595lm
System efficiency(lm/W):	80
Led driver / alimentatore	integrated / Incluso
Tilt Angle / Angolo di inclinazione:	Tilt 38°

**Light source information**

Led Typology / Tipo di Led:	COB
Led power consumption (W)	7.5
Lumen output / Flusso 3000K CRI 80 (lm):	630
Led efficiency (lm/W):	90

Packaging

N.W. lamp / peso netto prodotto(Kg):	0.36	0.49
G.W. carton / Peso lordo cartone (Kg):	19	24.5
Master carton dimensions (mm):	495x235x285	690x690x305
Quantity per carton / Prodotti per scatola:	50	50

**Code composition / Composizione del codice**

Model	Power	CRI	RA	CCTK	Beam °	Color	Cover	Dimming
LZ-12812-7R	07					WH	White	On-Off
		80	>92	4000	38	WH	WH	Triac Optn