



### EN. Description

Recessed products range made in aluminum by CNC machining. Surface finished by powder coating. The design allows to have low thickness products: Mila products are developed for installation where the spaces behind the ceiling and the panels are limited.



The deep front trim allow to reduce the glare created by the light source.

### IT. Descrizione


Collezione di dispositivi per incasso downlight ed orientabili realizzati in alluminio lavorato CNC e verniciato in powder coating. Il design e' concepito per contenere le dimensioni in altezza generando prodotti con spessore ridotto.

Sono adatti infatti in ogni installazione dove ci sono spazi ridotti in controsoffitti e pannellature.

L'ottica arretrata e la possibilita' di installare l'optional l'abbagliamento generato dalla sorgente luminosa.

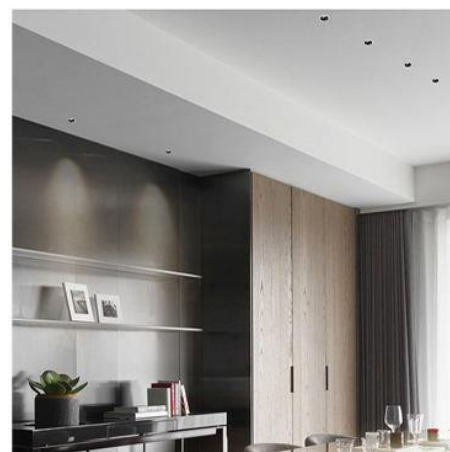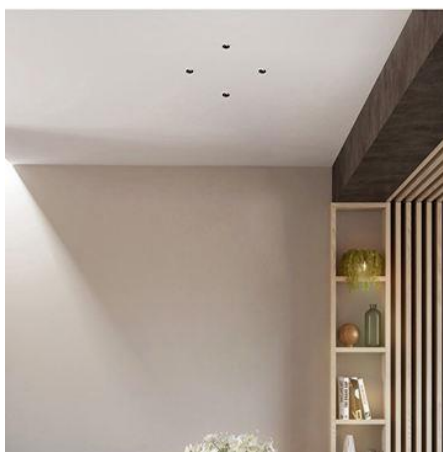

MILA 2



Product information

|                               |                                                     |
|-------------------------------|-----------------------------------------------------|
| Installation / Installazione: | Recessed / Incassato                                |
| Material / Materiale:         | Aluminum / Alluminio                                |
| Painting / Verniciatura:      | Highly pure powder coating / Verniciatura a polvere |
| System power(W):              | 2                                                   |
| Fixture lumen output(lm):     | 180                                                 |
| System efficiency(lm/W):      | 90                                                  |
| Led driver/ alimentatore      | Included / Incluso                                  |

Light source information


|                                          |                       |
|------------------------------------------|-----------------------|
| Led Typology / Tipodi Led:               | COB OSRAM             |
| Led power consumption (W)                | 2                     |
| Lumen output / Flusso 3000K CRI 90 (lm): | 240                   |
| Led efficiency (lm/W):                   | 120                   |
| Driver:                                  | LIFUD/ KGP /Eaglerise |

Packaging / Imballo

|                                             |             |
|---------------------------------------------|-------------|
| N.W. lamp / peso netto prodotto(Kg):        | 0.21        |
| G.W. catron / Peso lordo cartone (Kg):      | 10.5        |
| Master carton dimensions (mm):              | 380x380x540 |
| Quantity per carton / Prodotti per scatola: | 50          |


Code composition / Composizione del codice

| Model     | Power | CRI | RA         | CCT K   | Beam ° | Color    | Cover   | Dimming    |
|-----------|-------|-----|------------|---------|--------|----------|---------|------------|
| LZ12212-2 | 2W    | 90  | >90 SDCM 3 | 30 3000 | 15     | WH White | Clear   | On-Off     |
|           |       |     |            | 40 4000 | 24     | BK Black | Frosted | DALI 0-10V |



Mini decorative spot light

A small body makes a lot of energy



Double anti-dazzle design



Strong electroplate spring & plastic sleeve



Die casting aluminum radiator has fast heat dissipation



IP20 IK06  
IP44 IK06