


LZ-2141-COB-280P-24V-IP65



TECHNICAL DATA

INPUT VOLTAGE	24V DC
IP CODE	IP65
SMD	COB
SERVICE LIFE	5 Years
CRI	>90
BEAM ANGLE	120°
DIMENSION	10*4MM


Dimension Drawing:

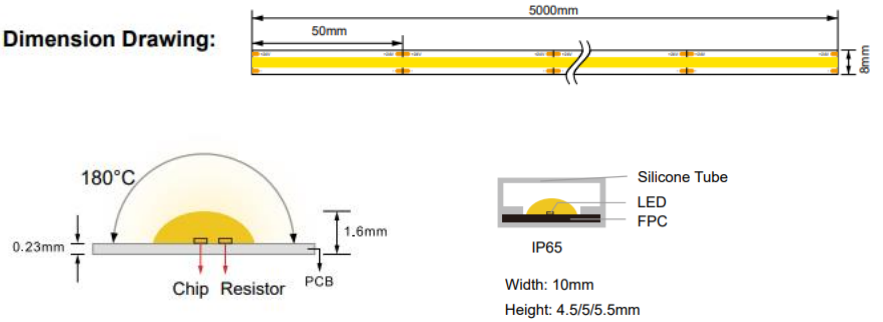


PRODUCTION OPTIONS

Item No.	Input voltage (V)	Power (W)	Color temperature	FPCB width	Luminous Flux	Cutting Possibility (MM)	Max Run length	LED QTY (PCS)	IP GRADE
	24V DC	10W/M	3000±100K	8MM	850 LM/M	5CM	5M	280pcs	IP65
LZ-2141-COB-280P- IP65	24V DC	10W/M	4000±100K	8MM	950LM/M	5CM	5M	280pcs	IP65
	24V DC	10W/M	6500±200K	8MM	1000LM	5CM	5M	280pcs	IP65


Average Luminous Flux



Illuminance Diagram:



Construction Drawing:

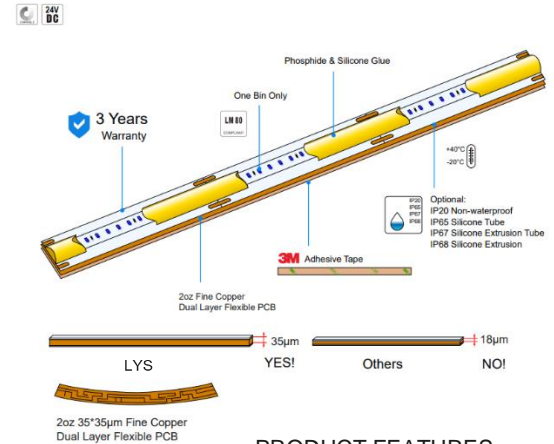

RoHS CE facts®




SPECIFICATION

POWER CONSUMPTION

HIGH COLOR RENDERING INDEX

SUPER HIGH LIGHT OUTPUT



PRODUCT FEATURES

- Silicone extrusion molding, environmental protection, UV resistance
- The minimum cutting unit is 5CM, which can meet the design requirements of various scenes
- Uniform lighting
- High quality circuit for stable and reliable perform
- Working temperature:-20~50°C