



# LZ-2141-COB-480P-24V-IP65

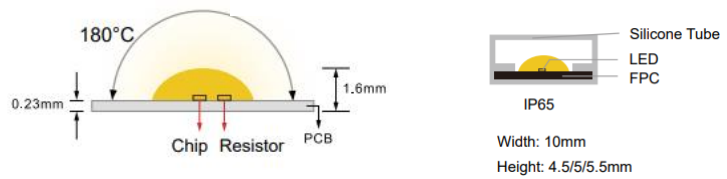

## TECHNICAL DATA


INPUT VOLTAGE	24V DC
IP CODE	IP65
SMD	COB
SERVICE LIFE	5 Years
CRI	>90
BEAM ANGLE	120°
DIMENSION	10*4MM




## PRODUCTION OPTIONS

Item No.	Input voltage (V)	Power (W)	Color temperature	FPCB width	Luminous Flux	Cutting Possibility (MM)	Max Run length	LED QTY (PCS)	IP GRADE
	24V DC	12W/M	3000±100K	8MM	1080 LM	5CM	5M	480pcs	IP65
LZ-2141-COB-480P- IP65	24V DC	12W/M	4000±150K	8MM	1140LM	5CM	5M	480pcs	IP65
	24V DC	12W/M	6500±200K	8MM	1200LM	5CM	5M	480pcs	IP65

### Average Luminous Flux




### Illuminance Diagram:



Average Beam Angle (50%) : 138°

### Construction Drawing:

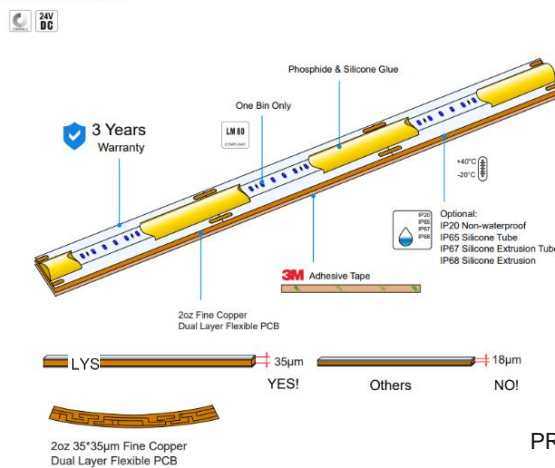

## SPECIFICATION

POWER CONSUMPTION



Angle



Resistant



Protection



Resistant



Protection



Resistant



Warranty



Resistant



DC24V

HIGH COLOR RENDERING INDEX

SUPER HIGH LIGHT OUTPUT

## PRODUCT FEATURES

- Silicone extrusion molding, environmental protection, UV resistance
- The minimum cutting unit is 5CM, which can meet the design requirements of various scenes
- Uniform lighting
- High quality circuit for stable and reliable perform
- Working temperature:-20~50°C