

# LYS

Lighting Norway-Europe

## Ever Recessed

Ever is family of products designed to offer the best in terms of size reduction and performance maximization.

The compact design makes it perfectly up-to-date as it guarantees a very low aesthetic impact when installed and at the same time sustainable from an economic, environmental and transport point of view.



# Cooling by air

Every design guarantees an ultra-efficient cooling passive system.

This solution is used in the whole range of products.

This solution is used in all the products in the range, becoming a distinctive stylistic element.



# The technique

The inner lighting engine is surrounded by the body, creating a free chamber for the extra air flow through the body.



# Extra-small

Size comparison with generic products having same performances.

28W

Diameter: 86mm

Height: 110mm





# Description

Lighting fixtures range for recessed installation in ceiling. Housing made of extruded aluminum with highly pure powder coating. Available in white (RAL 9003), black (RAL 9005) and grey aluminum (RAL9006) color. It mounts COB led. Reflector in specular silver anodized aluminum that can be easily and manually be replaced. The led driver is included and external to the fixture. Clear or frosted glass optional can be ordered. Fixing system by springs. The lumen output is based on 3000K(CRI90) led.

## **EVER-D Single**

Single head.  
Proiettore singolo.



## **EVER-D Double**

Double head.  
Proiettore doppio.





## **EVER-D Tripple**

Tripple head.  
Proiettore doppio.



# EVER-D Square

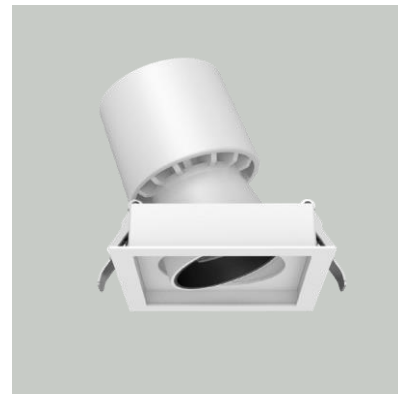

## Product information

	LZ-1791/20W	LZ-1791/28W
Installation / Installazione:	Recessed / Incassato	
Material / Materiale:	Aluminum / Alluminio	
Painting / Verniciatura:	Highly pure powder coating / Verniciatura a polvere	
System power(W):	20	28
Fixture lumen output(lm):	2100	3360
System efficiency(lm/W):	105	120
Led driver / alimentatore	Included / Inclusi	

## Light source information


	COB	COB
Led Typology / Tipo di Led:	COB	COB
Led power (W)	20	28
Lumen output / Flusso 3000K CRI 90 (lm):	2800	3900
Led efficiency (lm/W):	140	140

## Packaging / Imballo


N.W. lamp / peso netto prodotto(Kg):	0.55	0.55
G.W. carton / Peso lordo cartone (Kg):	20.2	20.2
Master carton dimensions (mm):	380*380*540	380*380*540
Quantity per carton / Prodotti per scatola:	36	36

## Code composition / Composizione del codice


Model	Power	CRI RA	CCT K	Beam °	Color	Cover	Dimming
LZ-1791-20	20W	90 >90 SDCM 3	30 3000	15	WH White	NA	On-Off
LZ-1791-28	28W		35 3500	24	BK Black		DALI
			40 4000	36			Phase-Cut
			50 5000				1-10V




15°20 W-3000K-90CRI




24°20 W-3000K-90CRI

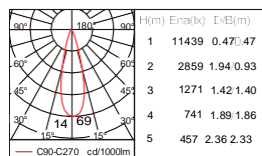

36°20 W-3000K-90CRI

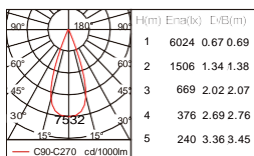

# EVER-D Double



## Product information

	LZ-1791/2*20W	LZ-1791/2*28W
Installation / Installazione:	Recessed / Incassato	
Material / Materiale:	Aluminum / Alluminio	
Painting / Verniciatura:	Highly pure powder coating / Verniciatura a polvere	
System power(W):	40	56
Fixture lumen output(lm):	4200	6720
System efficiency(lm/W):	105	120
Led driver / alimentatore	Included / Incluso	

## Light source information


Led Typology / Tipo di Led:	COB	COB
Led power (W)	40	56
Lumen output / Flusso 3000K CRI 90 (lm):	5600	7800
Led efficiency (lm/W):	140	140

## Packaging / Imballo


N.W. lamp / peso netto prodotto(Kg):	1.05	1.05
G.W. carton / Peso lordo cartone (Kg):	20.2	20.2
Master carton dimensions (mm):	480*380*540	480*380*540
Quantity per carton / Prodotti per scatola:	18	18

## Code composition / Composizione del codice


Model	Power	CRI RA	CCT K	Beam °	Color	Cover	Dimming
LZ-1791-2*20	40W	90 >90 SDCM 3	30 3000	15	WH White	NA	On-Off
LZ-1791-2*28	56W		35 3500	24	BK Black		DALI
			40 4000	36			Phase-Cut
			50 5000				1-10V




15°20 W-3000K-90CRI




24°20 W-3000K-90CRI

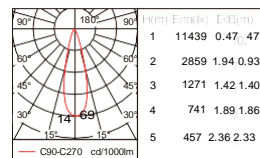

36°20 W-3000K-90CRI

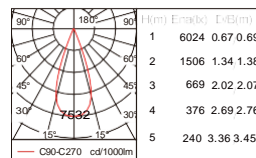

# EVER-D Tripple



## Product information

	LZ-1791/3*20W	LZ-1791/3*28W
Installation / Installazione:	Recessed / Incassato	
Material / Materiale:	Aluminum / Alluminio	
Painting / Verniciatura:	Highly pure powder coating / Verniciatura a polvere	
System power(W):	60	84
Fixture lumen output(lm):	6300	10080
System efficiency(lm/W):	105	120
Led driver / alimentatore	Included / Incluso	

## Light source information


	COB	COB
Led Typology / Tipo di Led:	COB	COB
Led power (W)	60	84
Lumen output / Flusso 3000K CRI 90 (lm):	8400	11760
Led efficiency (lm/W):	140	140

## Packaging / Imballo


N.W. lamp / peso netto prodotto(Kg):	1.65	1.65
G.W. carton / Peso lordo cartone (Kg):	20.5	20.5
Master carton dimensions (mm):	510*340*540	510*340*540
Quantity per carton / Prodotti per scatola:	12	12

## Code composition / Composizione del codice


Model	Power	CRI RA	CCT K	Beam °	Color	Cover	Dimming
LZ-1791-3*20	60W	90	>90 SDCM 3	30 3000	15	WH White	NA On-Off
LZ-1791-3*28	84W			35 3500	24	BK Black	DALI
				40 4000	36		Phase-Cut
				50 5000			1-10V

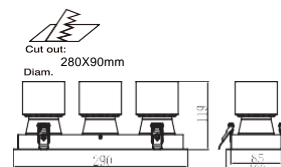

15°20 W-3000K-90CRI



24°20 W-3000K-90CRI

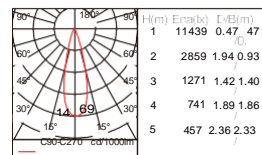

36°20 W-3000K-90CRI

