

Recessed/Incassi

# AQUA

**LYS**  
LYS-LIGHTS, Norway, Europe.



## EN.Description

Spotlight for recessed installation in Ceiling.  
Stepless regulation 0-30° at any angle  
IP65 Structure and IP65 Waterproof driver  
Housing made of die casting aluminum  
highly pure power coating painted.  
Available in White(RAL9003),Black(RAL9005)  
**and Beige (RAL9001),and other customize colors**  
It mounts COB LED.  
5MM slim front ring  
UGR<19  
the lumen output is based on 3000K (CRI90) LED.

## IT.Descrizione

Faretto per installazione a incasso nel soffitto.  
Regolazione continua 0-30° a qualsiasi angolo  
Struttura IP65 e driver impermeabile IP65  
Corpo in alluminio pressofuso  
verniciato ad alta purezza.  
Disponibile in Bianco (RAL9003), Nero (RAL9005)  
e beige (RAL9001), e altri colori di personalizzare  
Monta COB LED.  
Anello anteriore sottile da 5 mm  
UGR<19  
Il flusso del prodotto è basato su led a  
3000K con CRI90.

## En.Inspiration

washroom illumination  
outdoor corridor illumination

## IT.Ispirazione

Illuminazione dei bagni  
Illuminazione esterna del corridoio



# Recessed/ Incassi



## AQUA-10

### Product Information

LZ-12912-10 AQUA

Installation/Installazione	Recessed/ Incassato
Material/Materiale	Aluminum/Alluminio
Painting / Verniciatura:	Highly pure power coating / Verniciatura a polvere
System Power: (W)	10
Fixture Lumen Output(lm):	800
<b>System efficiency (lm/w):</b>	<b>80</b>
LED Driver IP rate:	IP20 (IP65 optional)
Fixture Color:	White / Black /Beige



### Lighting Source Information

LED Typology / Tipo di Led	COB
LED Power consumption (W)	10
Lumen output / Flusso 3000K cri 90 lm:	1200
LED efficiency (lm/w):	120

### Packing/ Imballo



N.W. Lamp/ peso netto prodotto (kg):	0.46
G.W Carton / Peso lordo cartone (Kg):	
Master carton dimensions (mm)	
Quantity per carton: Prodotti per scatola:	30




### Code Composition / Composizione del codice

Model	Power	CRI RA	CCT K	Beam	Color	Cover	Dimming
LZ-12912-10	10W	90 >92 SDCM 3	30 3000	24°	WH White	Clear Frosted	On-Off DALI 0-10V
		98 >98 SDCM 3	40 4000	36°	BK Black		
			50 5000		BG Beige		

Cut out:  
Ø 65mm

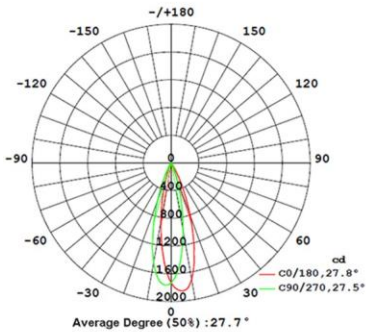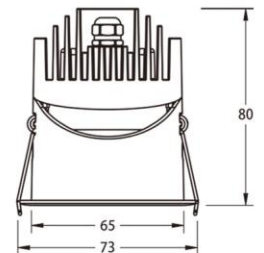

24°-3000K-CRI90

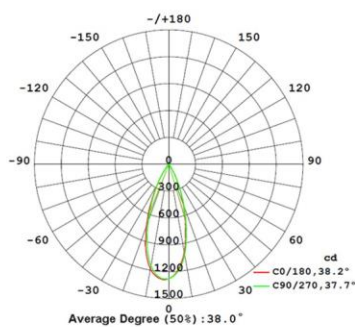

36°-3000K-CRI90