

CYLI

LYS
Lighting Norway-Europe



EN. Description

Durable, high sturdiness and robust ceiling/wall mounted luminaire, outstanding feature of this range is the option to have with Black white Grey finish, with one directional, wide choice of beam optics, extruded aluminum and die-cast aluminium housing, outdoor UV resistant powder coat finishing, 316L SS screws, fire resistant silicone seal waterproof gasket, 8mm thick toughened flush glass with trim, integrated driver

IT. Descrizione


Apparecchio per illuminazione a soffitto/parete durevole, estremamente robusto e robusto, caratteristica eccezionale di questa gamma è la possibilità di avere con finitura Nero Bianco Grigio, con un'ottica direzionale e ampia scelta di fasci ottici, alloggiamento in alluminio estruso e pressofuso, resistente ai raggi UV per esterni finitura con verniciatura a polvere, viti SS 316L, guarnizione impermeabile con guarnizione in silicone ignifugo, vetro temperato a filo spessore 8 mm con rivestimento, driver integrato

EN. Inspiration


Corridor illumination.

IT. Ispirazione

Illuminazione di un corridoio.

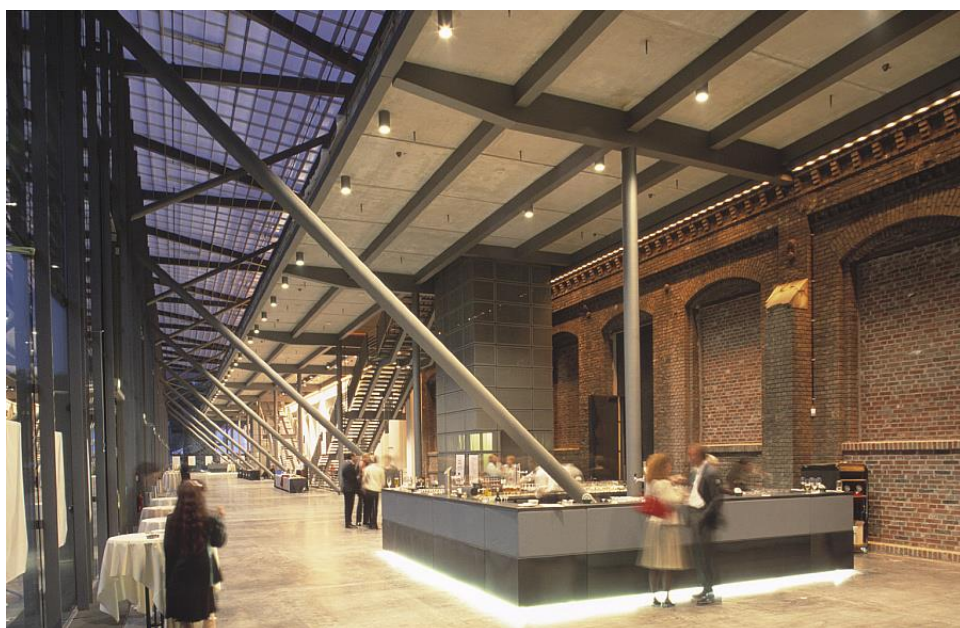

CYLI



Product information

LZ-22712

Installation / Installazione:	Surface/ Superficie
Material / Materiale:	Aluminum / Alluminio
Painting / Verniciatura:	Highly pure powder coating / Verniciatura a polvere
System power(W):	10,15,20,30,40,50
System efficiency(lm/W):	80
Led driver / alimentatore	Included / Incluso

Light source information


Led Typology / Tipo di Led:	COB
Lumen output / Flusso 3000K CRI 90 (lm):	1200
Led efficiency (lm/W):	120

Packaging / Imballo

N.W. lamp / peso netto prodotto(Kg):	0.36	0.49
G.W. carton / Peso lordo cartone (Kg):	15.85	10.8
Master carton dimensions (mm):	420x230x470	570x270x240
Quantity per carton / Prodotti per scatola:	40	20




Beam Angle




Code composition / Composizione del codice

Model	Wattage	Input voltage	Luminous Flux	Dia A	Height B
LZ-22712-10	10W	120V/ 240V	800lms	Φ75	100
LZ-22712-15	15W	120V/ 240V	1200lms	Φ75	150
LZ-22712-20	20W	120V/ 240V	1600lms	Φ95	150
LZ-22712-30	30W	120V/ 240V	2400lms	Φ115	150
LZ-22712-40	40W	120V/ 240V	3200lms	Φ140	162
LZ-22712-50	50W	120V/ 240V	4000lms	Φ170	182

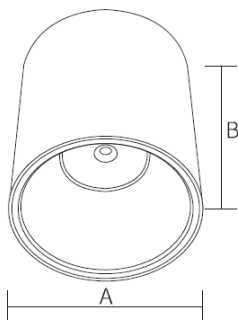

☐ WHITE ■ BLACK

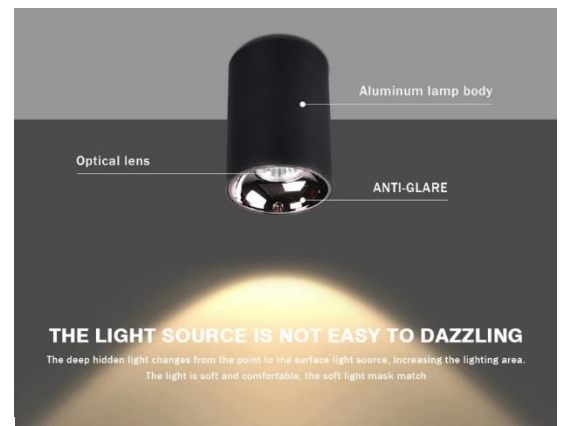

Secondary reflector



In the above you compose: LZ-525-10-10watts-CRI>98 4000K-45° Beam angle-Black-Clear cover-On-Off version