


## LINY – 36S



Higher performance linear wall washing solution with an extended range of selection, novel structure without epoxy sealing, extruded aluminium body, tempered glass diffuser, stainless steel support, high heat dissipation and prolonged life span, multi-angle and polarized lens design to maximize utilization of light, flexible and adjustable bracket makes the beam angle more accurate and brings a more extraordinary grazing effect, optional baffle/visor structure for reduced glare and optimized lighting control, 24Vdc model and RGB versions are also available.

Soluzione wallwashing lineare ad alte prestazioni con una gamma estesa di selezione, nuova struttura senza sigillatura epossidica, corpo in alluminio estruso, diffusore in vetro temperato, supporto in acciaio inossidabile, elevata dissipazione del calore e durata prolungata, design delle lenti multi-angolo e polarizzate per massimizzare l'utilizzo di la staffa leggera, flessibile e regolabile rende l'angolo del fascio più preciso e offre un effetto radente più straordinario, struttura opzionale deflettore/visiera per ridurre l'abbagliamento e controllare l'illuminazione ottimizzata, sono disponibili anche il modello a 24 V CC e le versioni RGB.

### Product information

#### LZ-24612-36S

Installation / Installazione:	Surface / Superficie
Material / Materiale:	Die-Aluminum / Alluminio
Front Cover / Verniciatura:	Stainless Steel316L / Verniciatura a polvere
System power(W):	36W
Fixture lumen output(lm):	3060
System efficiency(lm/W):	85
Led driver / alimentatore	Included / Incluso
Tilt Angle / Angolo di inclinazione:	Yes



### Light source information

Led Typology / Tipo di Led:	LED CREE
Led power consumption (W)	36W
Lumen output / Flusso 3000K CRI 80 (lm):	3600
Led efficiency (lm/W):	100





### Material Accessories

Cable galand	IP-68 copper and nickel coated
Step tempered glass/Gradino in vetro temperato	T=12MM,Loading capacity: >1330kg
Power cable/Cavo di alimentazione	0.5m H05RN-F 2x1.0mm2




### Code composition / Composizione del codice

Model	Power	CRI	RA	CCT	K	Beam °	Color	Cover	Dimming
LZ-24612	36W	90	>92	SDCM 3	30	3000	15-25-30	SS	Clear On-Off
		95	>95	SDCM 3	40	4000	20*45	Grey	Frosted DALI



Adjustable angle 1


Adjustable angle 2



One input - one output



One input - two output

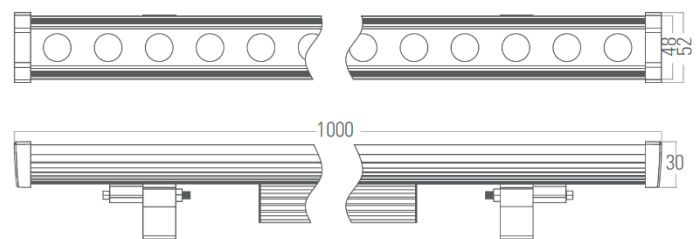

We recommend using the water-proof connectors as shown above for all outdoor fixtures. Installers should prepare the appropriate main cables of suitable rating and diameter with the right IP rated connectors.