

PLUTO



EN. Description

Spotlight module for recessed installation in ceiling.
 Housing made of die casting aluminum highly pure powder coating painted.
 Available in Matt black (RAL 9005) and grey aluminum (RAL 9006) color.
 It mounts COB led.
 Reflector in vacuum aluminum plated PC. UGR.
 <19
 The led driver is included and external to the fixture.
 Clear or frosted shade can be ordered.
 Fixing system by flat springs.
 The lumen output is based on 3000K (CRI90) led.

IT. Descrizione

Spotlight per installazione ad incasso in soffitto.
 Corpo del prodotto realizzato in pressofusione di alluminio verniciato con tecnica powder coating e polveri con elevato grado di purezza.
 Disponibile in colorazione bianca (RAL 9003), nera (RAL 9005) e grigia alluminio (RAL 9006).
 Prodotto con led COB.
 Riflettore in PC placcato in alluminio.
 $UGR < 19$.
 L'alimentatore è incluso ed è esterno al corpo del prodotto.
 Optional disponibili: schermo satinato o trasparente.
 Sistema di fissaggio tramite molle piatte.
 Il flusso del prodotto è basato su led a 3000K con CRI90.



SCENE DISPLAY

HALLWAY

Minimalist and clever space makes simple sense life easily.



PLUTO 6

PLUTO 9

Product information

	LZ-1261/6W	LZ-1261/9W
Installation / Installazione:	Recessed / Incassato	
Material / Materiale:	Aluminum / Alluminio	
Painting / Verniciatura:	Highly pure powder coating / Verniciatura a polvere	
System power(W):	6	9
Fixture lumen output(lm):	600	900
System efficiency(lm/W):	100	100
Led driver / alimentatore	Included / Incluso	

Light source information

Led Typology / Tipo di Led:	COB	
Led power consumption (W)	6	9
Lumen output / Flusso 3000K CRI 80 (lm):	720	1080
Led efficiency (lm/W):	120	120





Packaging / Imballo

N.W. lamp / peso netto prodotto(Kg):	0.36	0.49
G.W. carton / Peso lordo cartone (Kg):	15.85	10.8
Master carton dimensions (mm):	420x230x470	570x270x240
Quantity per carton / Prodotti per scatola:	100	100

Model	LZ-1241C-6M	LZ-1241C-9M
Power	6W	9W
Input Voltage	220-240VAC	220-240VAC
Driver	PHILIPS/TRIDONIC	PHILIPS/TRIDONIC
Beam angle	15°/24°/36°/60°	15°/24°/36°/60°
Efficiency	100lm/W	100lm/W
CRI	>90	>90
Kelvin	CCT/27K/3K/4K/6K	CCT/27K/3K/4K/6K
Type	COB	COB
Housing materials	Aluminum	Aluminum
IP rating	20/44	20/44
Dimension	H30mmxW50mm	H60mmxW50mm



4 BEAM ANGLE FOR BOTH LENS/
REFLECTOR VERSION| HONEYCOMB AVAILABLE

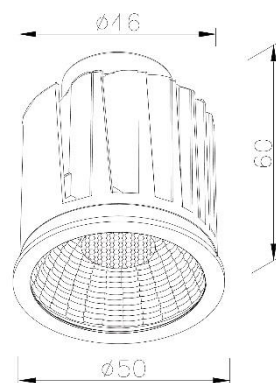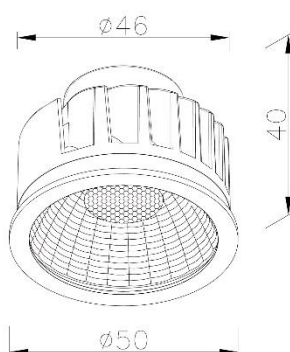
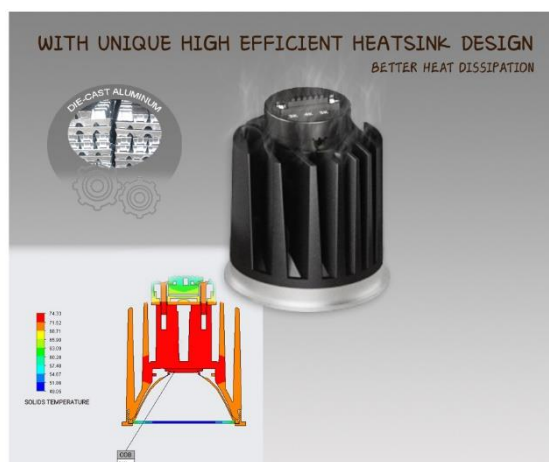
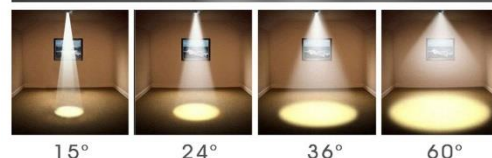


FRAMES


LZ-124AFC-1 BK/WH



□ WHITE ■ BLACK



H40



Ø83






Cutout
Ø75


LZ-124AFC-2 BK/WH



□ WHITE ■ BLACK



H40



Ø83





Cutout
Ø75


LZ-124AFC-3 BK/WH



□ WHITE ■ BLACK



H43




83

83




Cutout
75*75


LZ-124AFC-6BK/WH

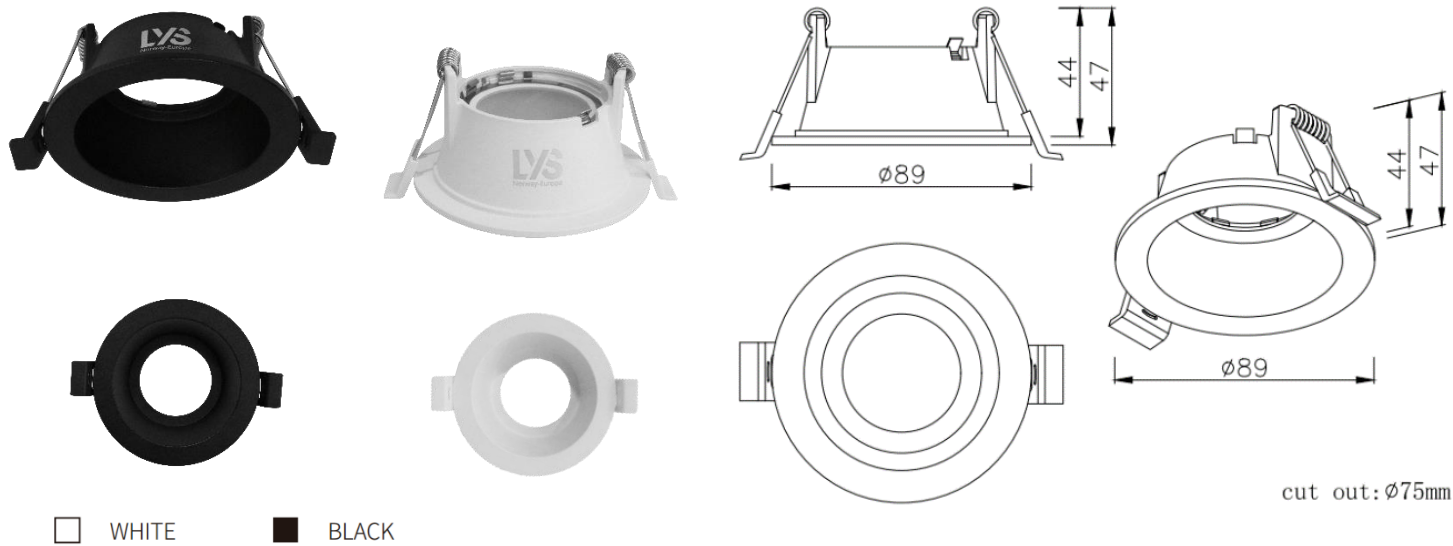

LZ-124AFC-3B/12F/R BK/WH

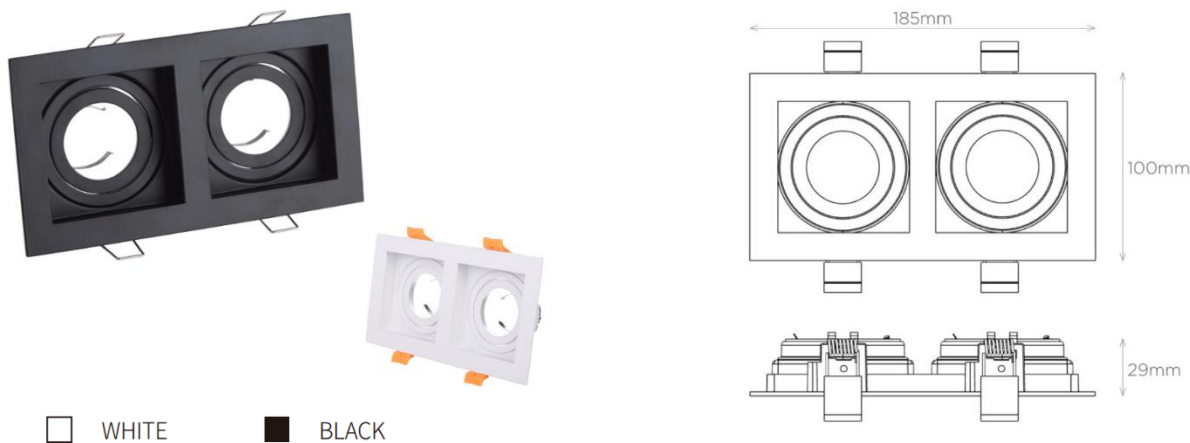


LZ-124AFC-11

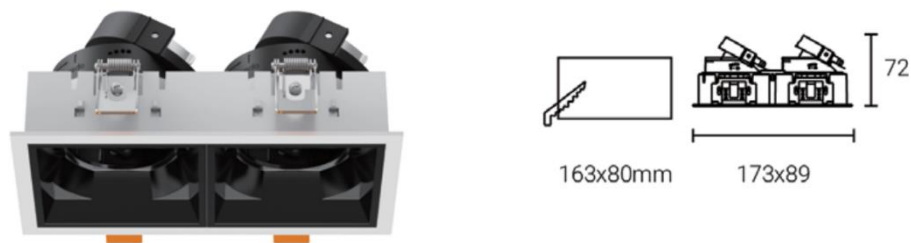

Secondary reflector



LZ-124AFC-12 CH/PB/SS/MW/MB/SG

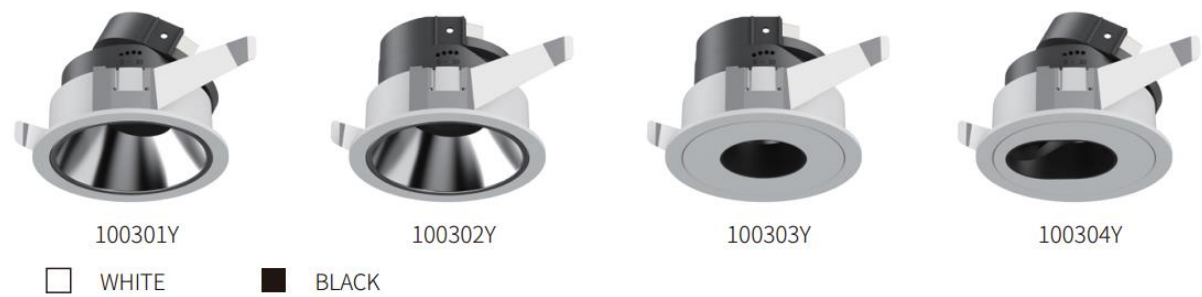

Secondary reflector

