


LYS DOT LONG RUN SERIES


LZ-2141-COB-480P-24V-IP67

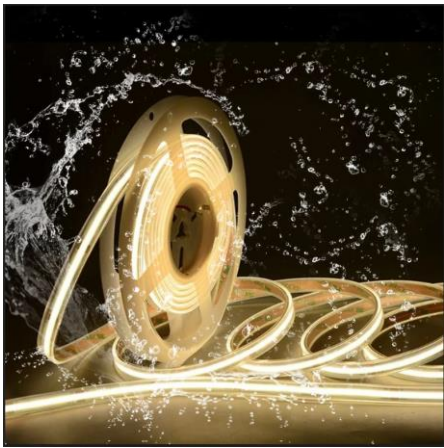

TECHNICAL DATA

INPUT VOLTAGE	24V DC
IP CODE	IP67
SMD	COB
SERVICE LIFE	5 Years
CRI	>90
BEAM ANGLE	120°
DIMENSION	10*4MM


Dimension Drawing:

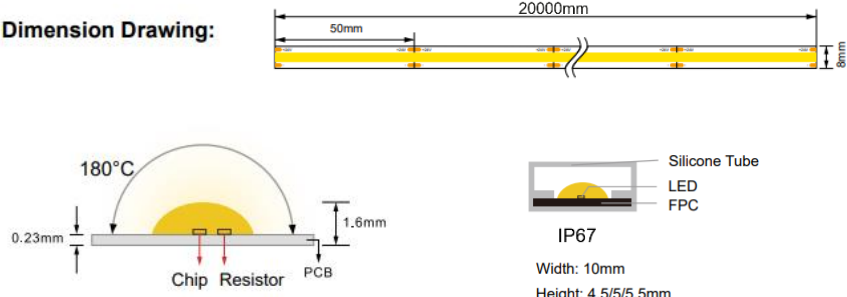


PRODUCTION OPTIONS

Item No.	Input voltage (V)	Power (W)	Color temperature	FPCB width	Luminous Flux	Cutting Possibility (MM)	Max Run length	LED QTY (PCS)	IP GRADE
	24V DC	8W/M	3000K	8MM	800LM	5CM	20M	480pcs	IP67
LZ-2141-CB 8LR	24V DC	8W/M	4000K	8MM	840LM	5CM	20M	480pcs	IP67
	24V DC	8W/M	6500K	8MM	880LM	5CM	20M	480pcs	IP6


Construction Drawing:

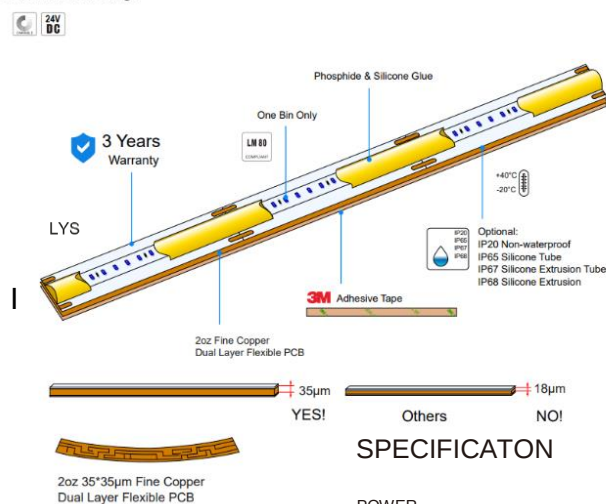

Average Luminous Flux

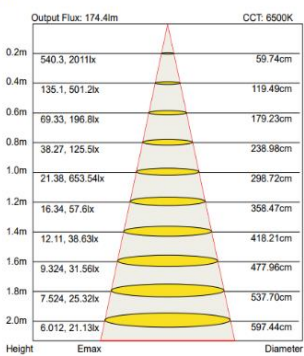

Illuminance Diagram:

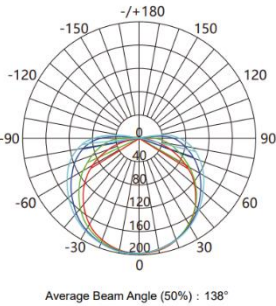


SPECIFICATION

POWER CONSUMPTION

HIGH COLOR RENDERING INDEX

SUPER HIGH LIGHT OUTPUT

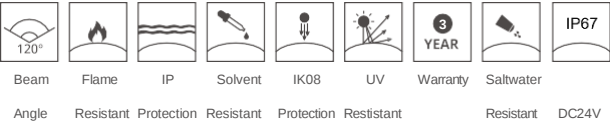

PRODUCT FEATURES

- Silicone extrusion molding, environmental protection, UV resistance
- The minimum cutting unit is 5CM, which can meet the design requirements of various scenes
- Uniform lighting
- High quality circuit for stable and reliable perform
- Working temperature:-20~55°C